THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009
© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
IK	2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	DWG HAS BEEN UPDATED	03-Aug-09	JG	JS
	C2	DESCRIPTION Cat.6 was Class Ea	02-Dec-09	JG	JS

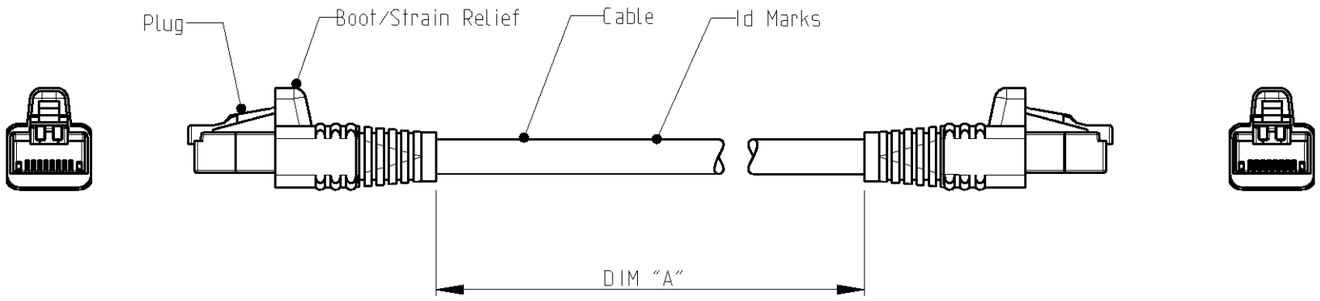

SCHEMATIC VIEW

1. RJ45 Cat.6 PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.

2. FOR AVAILABLE DASH LENGTHS, DIM A SEE THE TYCO LECTRONICS CATALOG

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL –
FINISH –

DWN J.GATNAU 03-Aug-09
CHK M.MAQUEDA 03-Aug-09
APVD J.SANABRA 03-Aug-09
PRODUCT SPEC 108-93010
APPLICATION SPEC –
WEIGHT –

Tyco Electronics
tyco Electronics AMP España, S.A.
Barcelona. Spain.

NAME
PATCH CORD RJ45 Cat.6 S/FTP PIMF600 LSZH STRANDED GREY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	–	C-1711076	–

CUSTOMER DRAWING | SCALE – | SHEET 1 OF 1 | REV C2